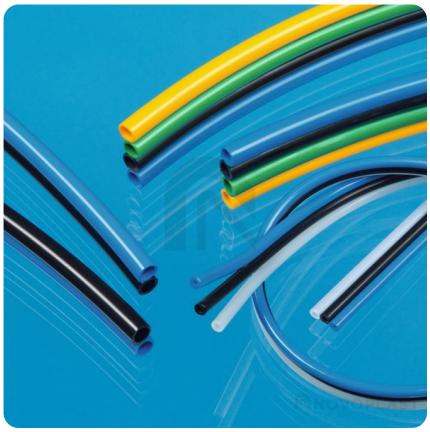


Master-Tube PA 12w Duo & Master-Tube PA 12w Trio

PA multi-layer tubing, containing plasticisers, fully welded, for industrial and pneumatic applications, temperature- and UV-resistant, abrasion-resistant, impact-resistant

spiral-free
metal-free
pressure resistant

Product Details

Construction / Material

- Execution of the wall: made of highly abrasion-resistant material

Properties

- Chemical Properties: good resistance to petrol, good resistance to chemicals, good resistance to solvents
- Mechanical Properties: high mechanical strength and surface hardness, high resistance to stress corrosion cracking, high mechanical strength and impact resistance
- Pressure Resistance: pressure resistant

Operating Temperature

- Temperature Range: -40to 85°C

Application Areas

- Areas of application: Plant & Mechanical Engineering, Industry

Customizing Options

- optional item modification (on request): printable, multiple hose

Disposal instructions

After use, the product must be disposed of in accordance with the legal regulations applicable in the user's region (in Germany in accordance with the applicable Waste Catalogue Ordinance (AVV)).



Individual consultation

We offer consultation by phone: **+49 209 97077 0**

Product requests via: **https://www.masterflex-slang.nl/**

Headquarters for your sales area

Masterflex SE

Willy-Brandt-Allee 300
45891 Gelsenkirchen
Germany