




Master-Tube PA

PA tubing containing plasticisers, resistant to paints and solvents, flexible, abrasion-resistant, impact-resistant

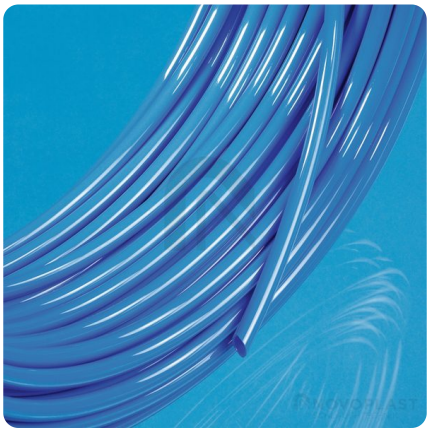

spiral-free | metal-free | temperature-resistant | pressure resistant

Product Details

Construction / Material

- Type of construction: axially extruded tubing without seams or welds
- Execution of the wall: very good sliding properties, made of highly abrasion-resistant material

Properties

- Chemical Properties: good resistance to petrol, good resistance to solvents, good resistance to oil, good UV resistance, good resistance to fats
- Mechanical Properties: high resistance to stress corrosion cracking, high mechanical strength and impact resistance
- Physical Properties: moisture resistant
- Pressure Resistance: pressure resistant

Operating Temperature

- Temperature Range: -40to 90°C

Application Areas

- Areas of application: Plant & Mechanical Engineering, Industry

Customizing Options

- optional item modification (on request): printable, rolls

Disposal instructions

After use, the product must be disposed of in accordance with the legal regulations applicable in the user's region (in Germany in accordance with the applicable Waste Catalogue Ordinance (AVV)).



Individual consultation

We offer consultation by phone: **+49 209 97077 0**

Product requests via: **https://www.masterflex-slang.nl/**

Headquarters for your sales area

Masterflex SE

Willy-Brandt-Allee 300
45891 Gelsenkirchen
Germany