


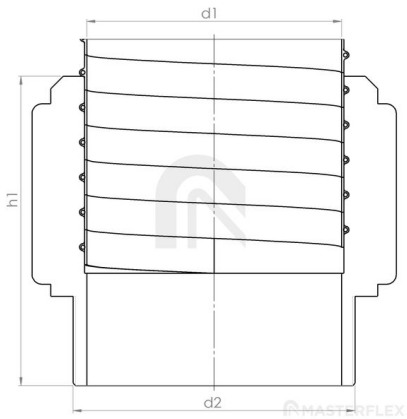

Combiflex PU Threaded Sockets Food

cast-on PU threaded connector for attaching fittings to Master-PUR Food hoses, approved for direct food contact EU 10/2011, following DIN ISO 228

Product Details

Construction / Material

- Specification of the connection solution: connection thread is designed according to DIN ISO 228
- Execution of the sprue / collar: high mechanical strength and impact resistance, made of specified material
- Material of the sprue / collar: polyurethane
- Specification of the sprue / collar: approved for direct food contact according to EU Directive 1935/2004, 10/2011 and its latest amending Directives, material complies with the food regulations of BfR XXXIX

Properties

- Chemical Properties: hydrolysis resistant, microbe-resistant
- Colour: white
- Other: easy to assemble

Operating Temperature

- Temperature Range: -40to 90°C
- short-term maximum temperature: peaks to 125 °C

Delivery Information

- Delivery, type of production: order-related production, various nominal diameters are available ex production, individual nominal diameters also ex stock

Article Variants

Article number	DN of the hose in mm	Piece weight in kg	Length (h1) in mm	Connection in Inch
005397	50	0.15	83	2
005408	65	0.22	94	2,5
005588	100	0.51	124	4

Article number	DN of the hose in mm	Piece weight in kg	Length (h1) in mm	Connection in Inch
001480	125	0.60	100	5
005462	150	0.90	109	6

Subject to technical changes and colour deviations

Delivery Variants

Available in other lengths, other nominal diameters, with customer-specific customer-specific imprint.

Disposal instructions

After use, the product must be disposed of in accordance with the legal regulations applicable in the user's region (in Germany in accordance with the applicable Waste Catalogue Ordinance (AVV)).



Individual consultation

We offer consultation by phone: **+49 209 97077 0**

Product requests via: **https://www.masterflex-slang.nl/**

Headquarters for your sales area

Masterflex SE

Willy-Brandt-Allee 300
45891 Gelsenkirchen
Germany